
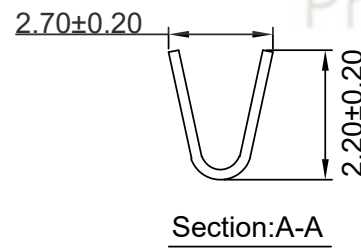

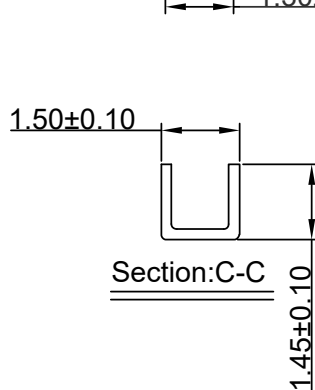
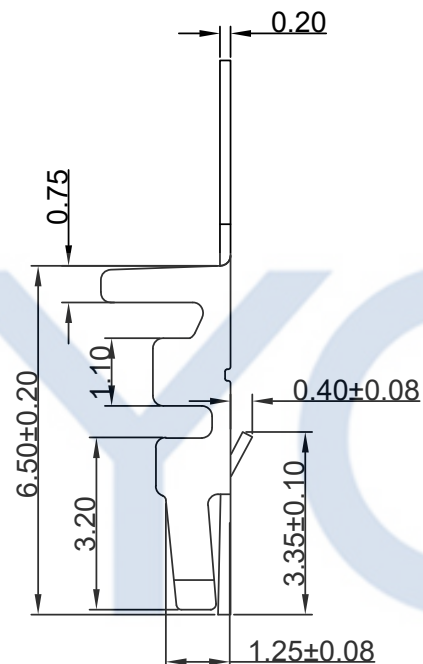


DRAWING FOR CUSTOMER

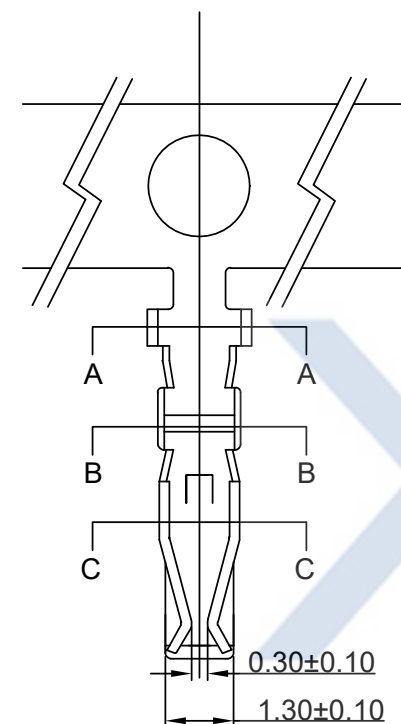

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:3.0A AC,DC
 - Withstand Voltage:800V AC/minute
 - Contact Resistance:10mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃

- Terminal:
- Material:Phosphor bronze
 - Finish:Tin/Gold-Plated,over Nickel
 - Applicable wire:AWG#22~32
 - QTY.:10KPCS/Reel

KB934-XXXT5A

1:All plated
2:Half plated

Plating
0: Tin-Plat
1: Gold Flash
2: Gold Plat3u"
3: Gold Plat5u"

Version

Mold No.

Terminal

Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

					TOLERANCE 公差	DRAWING 設計者	Devin	KB934-XXT5A	
2015-03-20	A	CHANGE HISTORY 變更歷史	KB934-XXT5A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
DATE 日期	VER 版本		CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE211001A



UNIT
單位

mm

PRODUCT NAME
產品名稱

PHD PH2.0mm Wire To Board
Terminal