

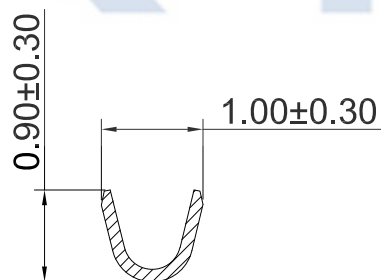

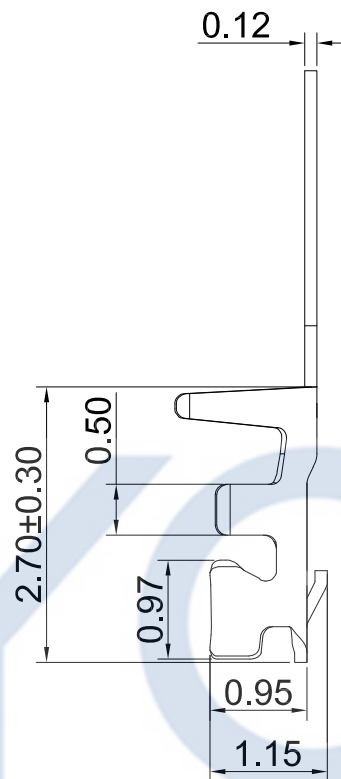




DRAWING FOR CUSTOMER

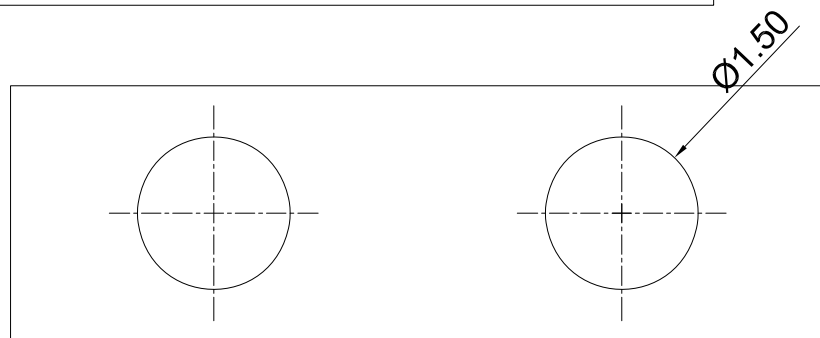

Section:B-B

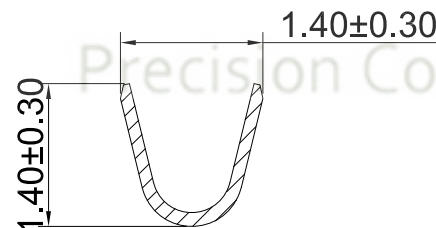

Section:A-A

■SPEC.:

- Rated Voltage:125V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Terminal:

- Material:Phosphor Bronze
- Finish:Tin-Plated,over Nickel
- Applicable wire:AWG#28~30
- QTY.:20KPCS/Reel

KB914-X X T 2 A

1:All plated
2:Half plated

Plating

0: Tin-plat
1: Gold Flash
2: Gold Plat3u"
3: Gold Plat5u"

Version

Mold No.

Terminal

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 <http://www.XYCO.com.cn>

					TOLERANCE 公差	DRAWING 設計者	Devin	KB914-XXT2A	
2018-10-23	A	CHANGE HISTORY 變更歷史	KB914-XXT2A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li	PART NO. 料號	
DATE 日期	VER 版本		CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE181007A



UNIT
單位

mm

PRODUCT NAME
產品名稱

PH1.25 Wire To Board Terminal