

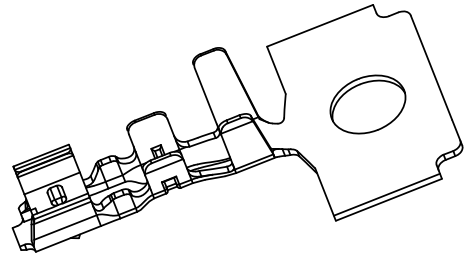
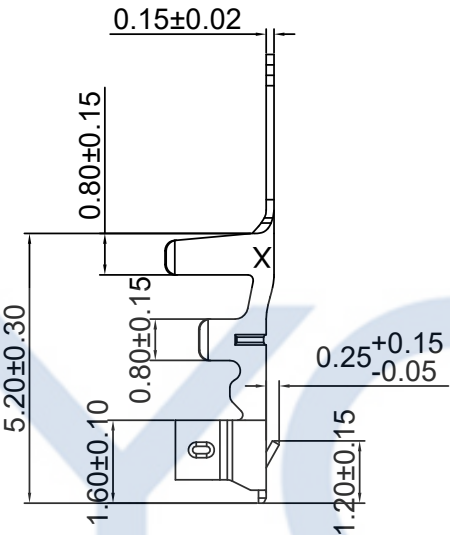
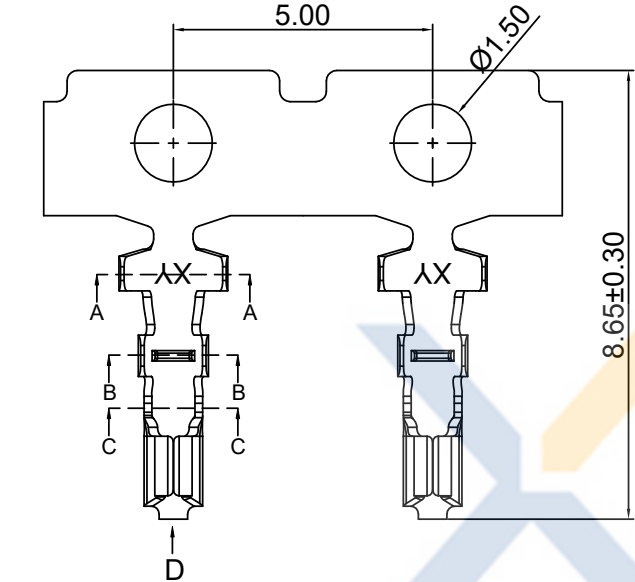





DRAWING FOR CUSTOMER



- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:1.5A AC,DC
 - Withstand Voltage:500V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃

- Terminal:
- Material:Phosphor Bronze
 - Finish:Tin-plated,over Nickel.
 - Applicable wire:AWG#24~30
 - QTY.:15KPCS/Reel



KB920-XXXT1A-X

1:All plated
2:Half plated

Plating
0: Tin-plat
1: Gold Flash
2: Gold Plat3u"
3: Gold Plat5u"

Mark
Version
Mold No.
Terminal

					TOLERANCE 公 差	DRAWING 設計者	Devin	KB920-XXT1A-X		XYCO 东莞市轩业电子科技有限公司 TEL: 0769-8297 9981 http://www.XYCO.com.cn				
2024-04-28	A		KB920-XXT1A-X	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li	PART NO. 料號		UNIT 單位	mm	PRODUCT NAME 產品名稱	PH1.50mm Wire To Board Terminal	
DATE 日期	VER 版本		CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	APPROVED 核准	William	DWG NO. 圖號	PE240435A					