
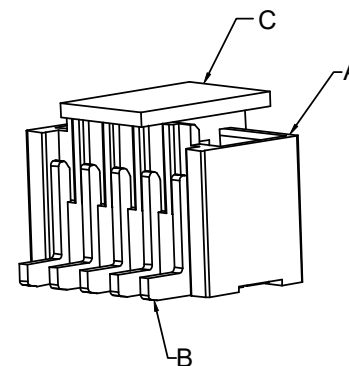


DRAWING FOR CUSTOMER

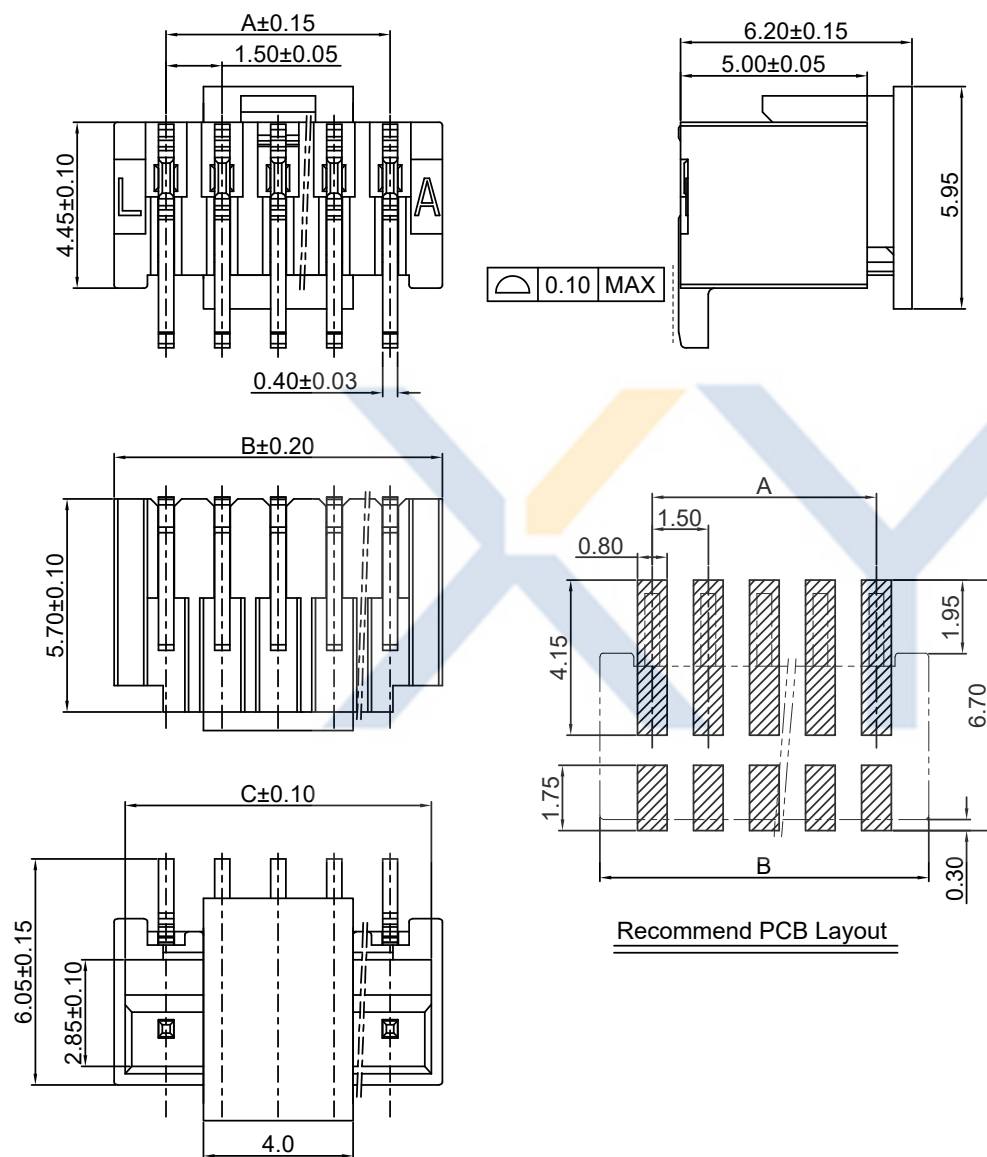

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material :

- Insulator(A): C1-LCP UL94V-0
Color:BGE-Beige
- Contact Pin(B):Phosphor Bronze
Finish:Tin-plated;over Nickel
- Cap(C):LCP UL94V-0
Color:Beige

KB920-X X X S V X 6 A -C1-BGE

Pin No.

P:PE 袋装
R:REEL 卷装
T:TUBE 管装
S:SMT
D:DIP

R:Right angle
V:Verical

Color

LCP

Version

Mold No.

G::Gold flash
S:Matte Sn

Poles	Dimensions(mm)		
	A	B	C
02	1.50	4.30	3.70
03	3.00	5.80	5.20
04	4.50	7.30	6.70
05	6.00	8.80	8.20
06	7.50	10.30	9.70
07	9.00	11.80	11.20
08	10.50	13.30	12.70
09	12.00	14.80	14.20
10	13.50	16.30	15.70
11	15.00	17.80	17.20
12	16.50	19.30	18.70
13	18.00	20.80	20.20
14	19.50	22.30	21.70
15	21.00	23.80	23.20

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 <http://www.XYCO.com.cn>

2015-10-28	A	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE 公差	DRAWING 設計者	Devin	KB920-XXXSVX6A-C1-BGE
DATE 日期	VER 版本	變更歷史	修改後料號	變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE1907003A

UNIT 單位	mm	PRODUCT NAME 產品名稱	87438 PH1.50mm Wire To Board SMT Right Angle Wafer
------------	----	----------------------	---