



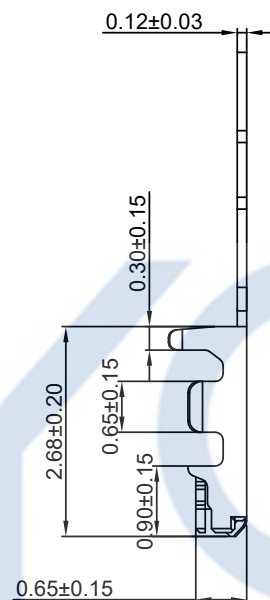


DRAWING FOR CUSTOMER

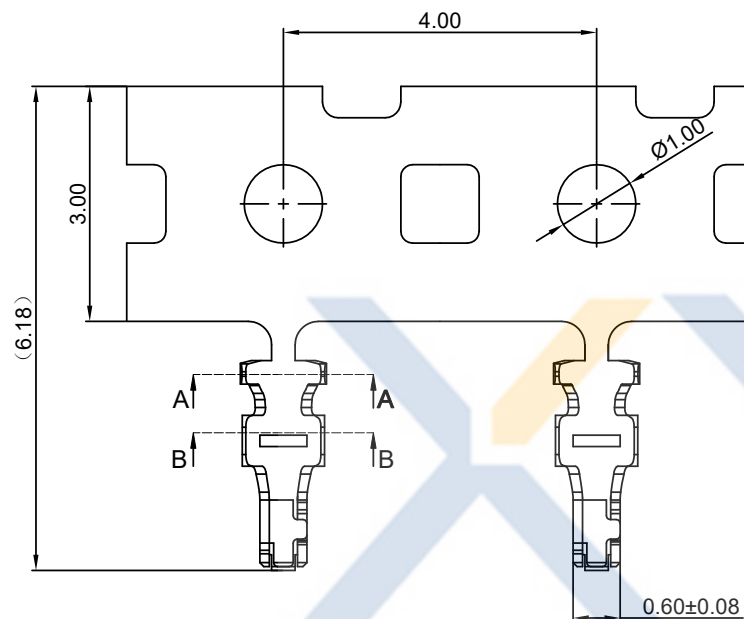

Section:B-B



Section:A-A

- SPEC.:
- Rated Voltage: 30V AC,DC
 - Rated Current:0.5A AC,DC
 - Withstand Voltage: 200V AC/minute
 - Contact Resistance: 20mΩ max
 - Insulation Resistance: 100MΩ min
 - Temperature Range: -25°C~+85°C

- Terminal:
- Material:Phosphor Bronze
 - Applicable Wire: AWG28#~32#
Insulation O.D:0.60mm (MAX)
 - Finish: Tin-plated;over Nicke
 - QTY.:30KPCS/Reel

KB804-XXT1A

- 1:All plated
2:Half plated

Plating

- 0: Tin-plat
1: Gold Plat1u"
2: Gold Plat3u"
3: Gold Plat5u"

Version

Mold No.

Terminal


Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 <http://www.XYCO.com.cn>

2026-02-03	A		KB804-XXT1A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li
	APPROVED 核准	William

KB804-XXT1A
PART NO. 料號
DWG NO. 圖號
PE260202A



UNIT
單位

mm

PRODUCT NAME
產品名稱

DF52 PH0.8mm Wire to Board
Terminal