
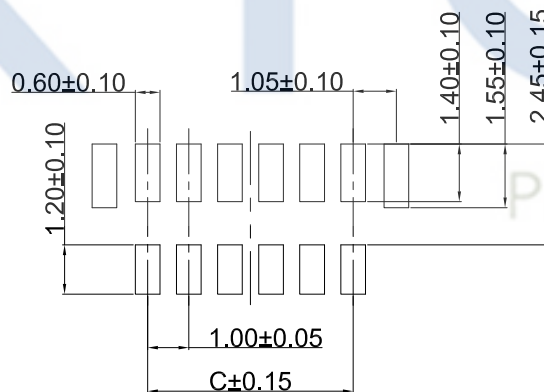
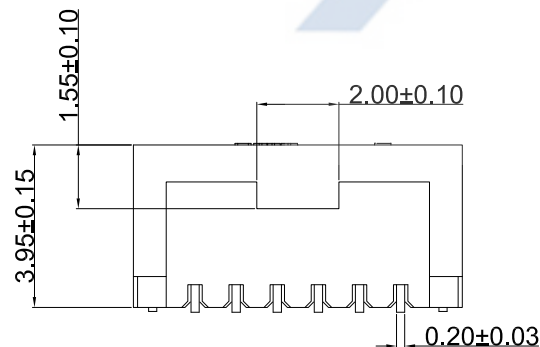

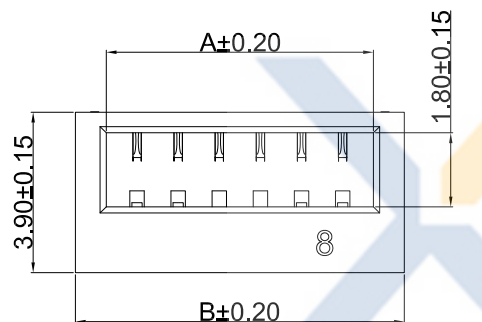



DRAWING FOR CUSTOMER

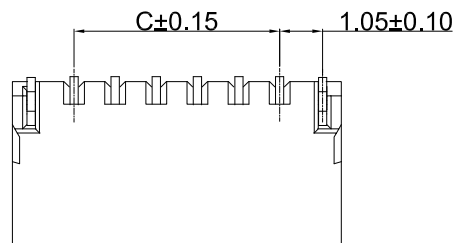

Board Layout

General Tolerance:±0.05

■SPEC:

- Rated Voltage:125V AC,DCm
- Rated Current: 1A AC,DC
- Withstand Voltage: 500V AC/minute
- Contact Resistance: 20mΩ max
- Insulation Resistance: 1000MΩ min
- Temperature Range: -25°C~+85°C

■Material :

- Insulator(A) : P7-PA10T.
Color:WH-White;BGE-Beige.
- Contact Pin(B):Copper Needle
Finish: Brass Tin-Plating
- QTY.:1500PCS/Reel

KB9904-XX X S V S 2 A-P1- XX

Pin No.

包裝方式:

T:TUBE (管裝)

R:REEL (卷裝)

P: PE (袋裝)

S:SMT

D:DIP

R:Right Angle

V:Vertical

Color

Material

Version

Mold No.

G:Gold flash

S: Tin-Plated

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
3P	3.50	5.00	2.00	10P	10.50	12.00	9.00
4P	4.50	6.00	3.00	11P	11.50	13.00	10.00
5P	5.50	7.00	4.00	12P	12.50	14.00	11.00
6P	6.50	8.00	5.00	13P	13.50	15.00	12.00
7P	7.50	9.00	6.00	14P	14.50	16.00	13.00
8P	8.50	10.00	7.00	15P	15.50	17.00	14.00
9P	9.50	11.00	8.00	16P	16.50	18.00	15.00

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 http://www.XYCO.com.cn

2017-06-06	A	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE 公差	DRAWING 設計者	Devin	KB9904-XXXSVS2A-P7-XX	
DATE	VER	變更歷史	修改後料號	變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li	PART NO. 料號	
日期	版本					APPROVED 核准	William	DWG NO. 圖號	PE240501A



PRODUCT NAME
產品名稱

SHJH PH1.00mm Wire To Board
SMT Vertical Wafer